


# DAIRA Brass

EDO®

EDO777302

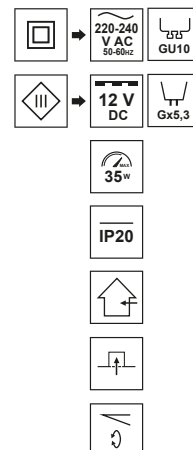

## Decorative ring of the lighting DAIRA Brass

DAIRA LED point luminaire is easy to install, it will pass the exam in modern rooms, as well as in larger spaces, where the use of one light source may not be sufficient. Perfect for creating a ceiling set consisting of several light points.

| SPECIFICATIONS                                    | EDO777302                 |
|---------------------------------------------------|---------------------------|
| Application:                                      | inside                    |
| Type of assembly:                                 | recessed into the ceiling |
| Installation site:                                | ceiling                   |
| Colour:                                           | brass                     |
| Type of finish:                                   | lustre                    |
| Material:                                         | steel                     |
| Dimensions:                                       |                           |
| -width [mm]:                                      | ø96mm                     |
| -length [mm]:                                     | -                         |
| -ring diameter [mm]:                              | ø65mm                     |
| -height [mm]:                                     | 3mm                       |
| -overall height [mm]:                             | 24mm                      |
| -mounting hole [mm]:                              | ø80mm                     |
| Adjustable:                                       | yes                       |
| Shutter:                                          | -                         |
| Socket included:                                  | no                        |
| Socket type:                                      | GU10/Gx3,5                |
| Number of slots:                                  | 1                         |
| Light source included:                            | no                        |
| TECHNICAL DATA                                    |                           |
| Maximum power [W]:                                | 35W                       |
| Rated voltage [V]:                                | 220-240 V AC/ 12 V DC     |
| Rated frequency [Hz]:                             | 50-60 Hz                  |
| IP:                                               | IP20                      |
| Protection class:                                 | II/III                    |
| Mercury content:                                  | no                        |
| Environmental conditions [°C]:                    | -20...50°C                |
| The minimum distance from illuminated object [m]: | 0,5m                      |
| LOGISTIC DATA                                     |                           |
| Collective packaging [pc.]:                       | 100pc                     |
| Weight [g]:                                       | 63g                       |
| Weight with packaging [g]:                        | 77g                       |

