PERETI LED PRO




EDO777613












PERETI LED PRO White 24W NW

| SPECIFICATIONS | ED0777613 | | |
|--|--------------------------------|--|--|
| Source type: | Ceiling lamp with built-in LEI | | |
| Application: | indoor | | |
| Type of assembly: | surface-mounted | | |
| Installation site: | ceiling and wall | | |
| Connection type: | screw cube | | |
| Colour: | white cover with white fram | | |
| Material: | cover and lampshade- PCV | | |
| Dimensions [mm]: | | | |
| -width [mm]: | ø350mm | | |
| -lenght [mm]: | | | |
| -height [mm]: | 55mm | | |
| Adjustable: | no | | |
| Lampshade: | mat | | |
| Replaceable light source: | no | | |
| Energy efficiency class [A-G]: | A F | | |
| Cooperation with a dimmer: | no | | |
| TECHNICAL DATA | | | |
| Power in the on-mode Pon [W]: | 24W | | |
| Standby power Psb/Pnet [W]: | / | | |
| Rated voltage [v]: | 220-240V | | |
| Rated frequency [Hz]: | 50 Hz | | |
| Color temperature [к]: | 4000K | | |
| Light color change: | no | | |
| Light distribution angle [°]: | 120° | | |
| Color rendering index CRI: | 80 | | |
| Color rendering index R9: | 16 | | |
| Total luminous flux [Im]: | = | | |
| Useful luminous flux [Im]: | 2400lm | | |
| Measurement of the luminous flux in [*]: | sphere (360°) | | |
| Luminous efficiency [lm/w]: | 100lm/W | | |
| Rated life [h]: | 25000h | | |
| Number of cycles on/off: | 15000 | | |
| On-mode energy consumption [kwh/1000h]: | 24kWh/1000h | | |
| IP: | IP44 | | |
| Protecion class: | II | | |
| Mercury content: | no | | |
| Environmental conditions [°c]: | -20°C40°C | | |
| LOGISTIC DATA | | | |
| Collective packaging [pcs.]: | 5pcs. | | |
| Weight [g]: | 616g | | |

| 5 | 904 | 252 | 4169 | 27.0 | |
|---|-----|-----|------|------|--|

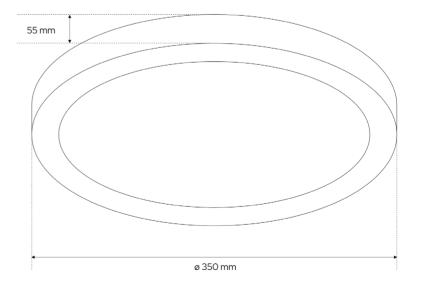

EAN:

