


NASTRO LED

EDO[®]
solutions

EDO777650



**ENERGY**

EDO
EDO777650

A

B

C

D


E

F


G


G


12
kWh/1000h





2019/2015


**12W/m**


**1100lm/m**


**cold white**
6000K

**12 V**
DC

**120°**

**IP22**

**III**

**5m**

LED tape - NASTRO LED COB 12W CW

SPECIFICATIONS	EDO777650
Source Type:	LED COB
Application:	indoor
Installation:	tape 3m
Dimensions:	
-length [mm]:	5000mm
-width [mm]:	8mm
-height [mm]:	2mm
-smallest division unit [mm]:	50mm
-cable length [mm]:	150mm
Number of LEDs per meter:	480LED/m
Energy efficiency class [A-G]:	A G
Cooperation with a dimmer:	yes
Cover material:	-
TECHNICAL DATA	
Power in the on-mode P_{on} [W]:	12W/m
Standby power P_{sb}/P_{net} [W]:	-
Rated voltage [V]:	12VDC
Color of the light:	cold white
Color temperature [K]:	6000K
Color rendering index CRI:	90
Useful luminous flux [lm]:	1100lm/m
Measurement of the luminous flux in:	wide cone (120°)
Light distribution angle [°]:	120°
Rated life [h]:	30000h
Number of cycles on/off:	15000
On-mode energy consumption [kWh/1000h]:	12kWh / 1000h
IP	IP22
Protection class:	III
Mercury content	no
Environmental conditions:	-20...40 °C
LOGISTIC DATA	
Collective packaging [pcs.]:	40pcs.
Weight [g]:	110g

EAN:




5 904252 617120

2 mm



8 mm

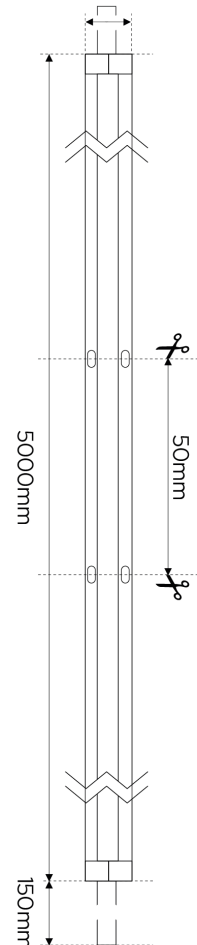

*The specifications given are based on a 1m LED strip test.