


SEKRO LED 9,6W/m WW



EDO77705

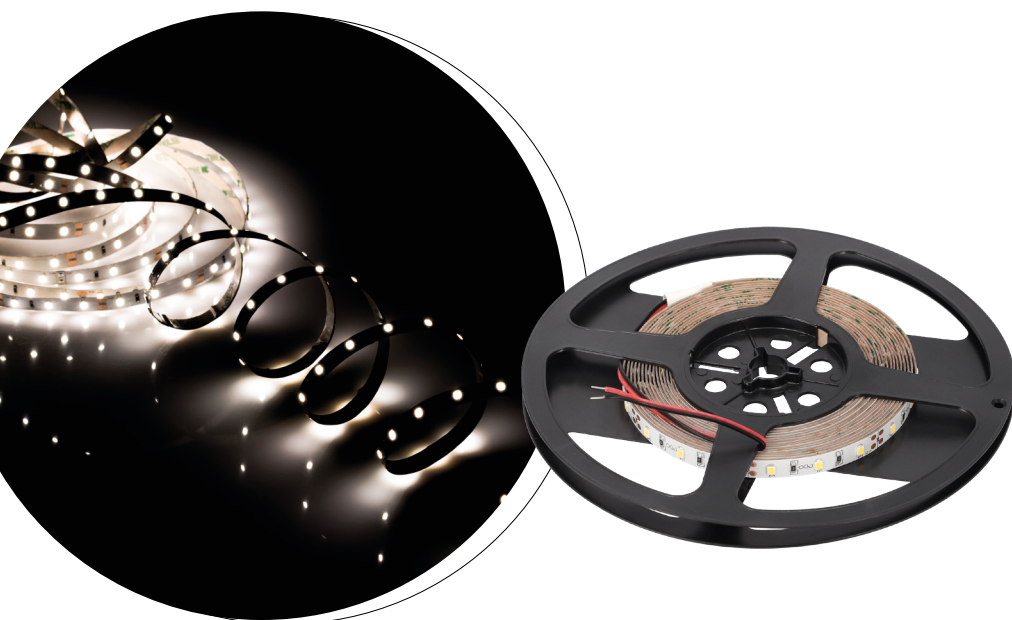

LED Tape SEKRO LED 9,6W/m WW

	ENERGY	9,6W/m															
EDO EDO77705		980lm/m															
<table border="1"> <tr><td>A</td></tr> <tr><td>B</td></tr> <tr><td>C</td></tr> <tr><td>D</td></tr> <tr><td>E</td></tr> <tr><td>F</td></tr> <tr><td>G</td></tr> </table>		A	B	C	D	E	F	G	<table border="1"> <tr><td>warm white</td></tr> <tr><td>3000K*</td></tr> <tr><td>60m LED</td></tr> <tr><td>12 V DC</td></tr> <tr><td>120°</td></tr> <tr><td>IP56</td></tr> <tr><td>III</td></tr> <tr><td>5m</td></tr> </table>	warm white	3000K*	60m LED	12 V DC	120°	IP56	III	5m
A																	
B																	
C																	
D																	
E																	
F																	
G																	
warm white																	
3000K*																	
60m LED																	
12 V DC																	
120°																	
IP56																	
III																	
5m																	
10 kWh/1000h																	
		2019/2015															

SPECIFICATIONS


Source type:	LED SMD
Application:	indoor/outdoor
Installation:	tape 3M
Dimensions [mm]:	
-length:	5m
-width:	8mm
-height:	1,2mm
-smallest division unit:	50mm
-cable length:	200mm
Numbers of LEDs per meter:	60 LED/m
Energy efficiency class [A-G]:	F
Cooperation with a dimmer:	yes
cover material:	silicone

TECHNICAL DATA*

Power in the on-mode P_{on} [W]:	9,6W/m
Standby power P_{sb}/P_{net} [W]:	-
Rated voltage [V]:	DC 12V
Color of the light:	warm white
Color temperature [K]:	3000K \pm 200K*
Color rendering index CRI:	80
Useful luminous flux [lm]:	980 lm/m
Measurement of the luminous flux in:	sphere (360 °)
Light distribution angle [°]:	120°
Rated life [h]:	50000h
On-mode energy consumption [kWh/1000h]:	10kWh/1000h
IP:	IP56
Protection class:	III
Mercury content:	no
Environmental conditions [°C]:	-20...40°C

LOGISTIC DATA

Collective packaging [pcs.]:	60pcs.
Weight [g]:	100g
Weight with packaging [g]:	110g
EAN:	

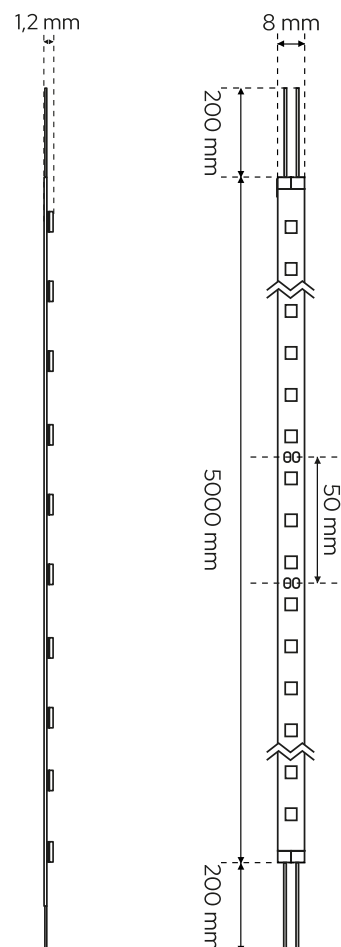

*The specifications given are based on a 1m LED strip test.

*Tolerance range for correlated color temperature \pm 200K

