
## SEKRO LED 9,6W/m NW






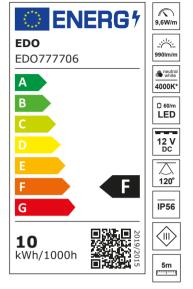

## LED Tape SEKRO LED 9,6W/m NW

Source type:	LED SMD
Application:	indoor/outdoor
Installation:	tape 3M
Dimensions [mm]:	
-lenght:	5m
-width:	8mm
-height:	1,2mm
-smallest division unit:	50mm
-cable lenght:	200mm
Numbers of LEDs per meter:	60 LED/m
Energy efficiency	
class [A-G]:	F
Cooperation with a dimmer:	yes
cover material:	silicone
TECHNICAL DATA*	
Power in the on-mode Pon [W]:	9,6W/m
Standby power Psb/Pnet [W]:	=
Rated voltage [v]:	DC 12V
Color of the light:	neutral white
Color temperature [κ]:	4000K ± 250K*
Color rendering index CRI:	80
Useful luminous flux [lm]:	990 lm/m
Measurement of the luminous flux in:	sphere (360 °)
Light distribution angle [°]:	120°
Rated life [h]:	50000h
On-mode energy consumption [kwh/1000h]:	10kWh/1000h
IP:	IP56
Protection class:	III
Mercury content:	no
Environmental conditions [°c]:	-2040°C
LOGISTIC DATA	
Collective packaging [pcs.]:	50pcs.
Weight [g]:	100g
Weight with packaging [g]:	110g
EAN:	5 00/252 4107

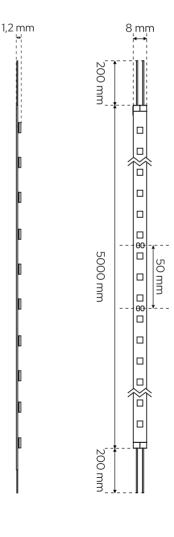

<sup>\*</sup>Tolerance range for correlated color temperature  $\pm$  250K



<sup>\*</sup>The specifications given are based on a 1m LED strip test.